

Tanks

Equipment for making safe LPG and Methane cylinders. In LPG cycle it drains the liquid part, it burns the residual part of gas and it fills with nitrogen. In Methane cycle it burns the residual gas and it fills with nitrogen. In compliance with CE Directive.



SBG



Petrol Gasoil
Tank for petrol & gas-oil 250+250 l (SBG) + 100 l (SBG-S) w/ collecting basin & pumps to siphon off.

SBG-S



KSL 5

KSL 4

Kit for liquids w/ retaining basin complete w/ visual and sounding level gauge (drums not included).



CST-M5

Kit 5 one-wall tanks, n. 3 x 325 l and n. 2 x 120 l.



KCL

Kit for the electrical control 5 liquids level complete of hous and fittings.



VSF 24

Double basin
1000 x 2400 mm - 780 l



VSF 12

Single basin
1000 x 1200 mm - 390 l



DBG

Automatic pneumatic pump for petrol and gas-oil.



NEW MRG



NEW MRG
GPL pump max flow Max 7 l/min
Overall dimensions (mm) 1000 x 800 x h. 1000
Weight (kg) 50

ISC Pneumatic drainage system complete with container, CTN and ISK-NEW. Drainage system includes 4 pneumatic diaphragm pumps, including BRL arm for oil collection and PFT-MONO with 1 diaphragm pump and air drill.



Fittings

BAG



Airbag de-activator basic, tools designed to secure all airbags of all vehicles.

PFA



Pneumatic shock absorber equipment complete of clamp, hoses and filter.

RGF

Automatic recovering system Freon and oil R12 and R134 with wheel-cart.

BRF

Stocking freon cylinder 12 l



UNI EN ISO 9001:2008
ref. N° 50 100 12164

www.iris-mec.it

NEW ENVIRONMENTAL TECHNOLOGY



IBC+

COMPACT DRAINAGE SYSTEM

4 cubic metres of space the IBQ+ offers a complete fluid drainage station designed to remove all vehicle fluids, oils and fuel. Optimally designed to ensure maximum performance at a competitive cost.

The IBQ+ is the only professional solution to both maximize productivity and return on your investment.



IBE NEW



PFT-V

NEW-ISE



Lifts

Pantographed lift designed specifically for car demolition. It's extremely strong and designed in compliance with EC directives. Projected particularly for the ELV drainage.

PM30



Certificate Nr. TÜV IT 12 MAC 0024
Refers to the serial number PM30-PM120901

PM30	
Maximum capacity (kg)	3000
Up slope time	28"
Down slope time	12"
Overall dimensions (mm)	4650 x 3300 x h. 2400
Weight (kg)	1550

PM30/EC



Pantographed lift with wheel bearing platform.

PM30/EC	
Maximum capacity (kg)	3000
Up slope time	28"
Down slope time	12"
Overall dimensions (mm)	4650 x 3300 x h. 2400
Weight (kg)	1400

CRL-EV



CRL



CRL - P



Fluid drainage system

The ISQ offers a complete fluid drainage station designed to remove all vehicle fluids, oils and fuels. Optimally designed to ensure maximum performance at a competitive cost.

ISQ



Brakes oil drainage, engine oil drainage, gear box oil drainage, windscreen-wiper water drainage, radiator's water drainage.

Tilting rig

The Revolving RBT Rig, allows full and safe dismantling of heavy and valuable mechanical parts from vehicles. It avoids the hazardous situation of working underneath the vehicle, and allowing the operator to work in an upright and comfortable position. Provided with automatic hydraulic locking device to hold vehicles safely in position whilst work is undertaken.

RBT



RBT EC



RBT EV



	RBT	RBT EV/EC
Maximum capacity (kg)	2500	2500
Tilting angle	90°	90°
Tilting forward/ return time	32"/ 36"	32"/ 36"
Lift ascent/ descent time	-	18"/ 13"
Overall dimensions (mm)	3235 x 1920 x 2840	1900/2020 x 3235 x 3500
Weight (kg)	1575	1130 (EC) - 1685 (EV)

NEW-ISK



NEW-ISE



NEW ISK - NEW ISE	
N° cycle / hour	6 / 10
Overall dimensions (mm)	990 x 650 x 1350
Weight (kg)	150 (ISK) / 160 (ISE)

IST



IST	
N° cycle / hour	6
Overall dimensions (mm)	990 x 650 x 1350
Weight (kg)	205

Punchers



Gasoil



Petrol



Petrol/ gasoil drainage
Petrol/ gasoil puncher
Overall dimensions (mm)
Weight (kg)



PFT-MONO



PFT-MONO
Pneumatic pump 50l/min
Beta air drill 500 W
800 x 400 x 1650
75

PFT



PFT / PFT-V
Pneumatic pump 50l/min
Beta air drill 500 W
800 x 400 x 1650
85 / 115

Junction box for catalytic cutter

CTC



CNC



CTC	
Max opening (mm)	90
Weight (kg)	9
CNC	
N° cycle / hour	250
Overall dimensions (mm)	860 x 693 x 540
Weight (kg)	60

Junction box for cutter

The professional threephase junction box with 1.3 CV engine with double pump to obtain a high speed and a 700 bar pressure. It is provided with an automatic on-off system and supplied with a wheel-cart.

CNT



Safety device



ICU05A30 CAT



ICU05A10 CABLE



ICU05A60 DIV



ICU10A30 CAT



ICU10A10 CABLE




RSX105-29 CAT

CNT	
N° cycle / hour	250
Overall dimensions (mm)	860 x 693 x 540
Weight (kg)	60

Wheels press

This machine is designed to separate the tire from the rim in an easy and safe way. The wheelspress reduces the volume of the iron and press it ready for furnaces. The wheelspress can crush from 80 to 140 wheels per hour, that means approximately 32 / 55 qt of iron per day. For this reason this machine gives a quick Return of Investment (ROI).

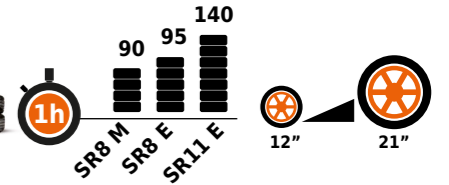

SR 8 M

	SR8 M	SR8 E	SR11 E
N° cycle / hour	90	95	140
Overall dimensions (mm)	1620x2400x3050	1620x2400x3050	1620x2400x3050
Weight (kg)	1350	1380	1400

Pneumatic glass cutter

A new device designed expressly to cut the front window of the car. This item is safe, fast and it does not produce micro-dust. It has a 60 l tank with a 1.2 CV aspirator threephase pump for continuous use. It is provided with an automatic on-off system and it is supplied with a wheel-cart.



TVP	
Forward speed	50 m/min
Overall dimensions (mm)	843 x 800 x 598
Weight (kg)	70